Technical Data Sheet

CODE 61754

NORDIK EVOLUTION R 120/48" ARGENTO

Reversible ceiling fans



Certifications

CE

EAC


CB TEST CERTIFICATE

Technical and performance data

Fan diameter	1284
Frequency (Hz)	50/60*
Insulation class	I°
Max absorbed current (A)	0,34
Max absorbed power (W)	70
Voltage (V)	220-240

Weight (Kg)	6,8
Max airflow (m³/h)	13810
Max airflow (m³/min)	230,17
Max flow speed (m/s)	2,36
RPM	198
Service value (m³/min)/W	3,288
Sound power Lw [dB(A)]	49,1

Dimensions

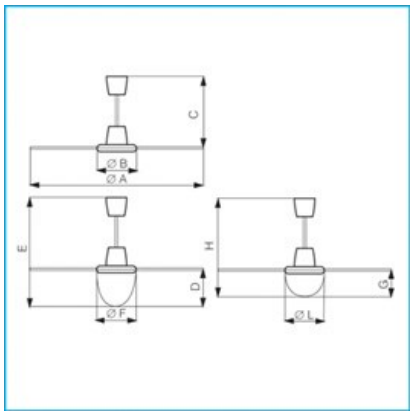

Size A (mm)	980
Size B (mm)	298
Size C (mm)	495
Size D (mm)	229
Size E (mm)	724
Size F (mm)	291
Size G (mm)	145
Size H (mm)	640
Size L (mm)	291

PER INFORMAZIONI / FOR INFORMATION

ITALY
Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES
Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 61754

NORDIK EVOLUTION R 120/48" ARGENTO

Reversible ceiling fans

Description

• Nominal diameter of blades 1200 mm
• Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour silver.
• Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant thermoplastic resin (PP).
• Single phase start capacitor motor with external rotor, and shaft turning in ball bearings. Direction of rotation reversible.
• Maximum air flow 13810 m3/h
• 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour silver.
• Steel ceiling rod with scratch-resistant polyester powder coated finish, colour silver, length 375 mm.
• Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
• Factory-prepared to accept a specific optional light kit with 2x15 W max energy saving lamp, E27 screw fitting.
• Speed selectable by way of control units or Telenordik 5TR remote control (optional)

Accessories



EVOLUTION LIGHT KIT ES
Code 22414



SCRR5
Code 12963



SCRR5L
Code 12964



SCRR/M
Code 12965



KIT SCBRR5/5L/M
Code 22489



SC 503 B
Code 12801



SC 503 N
Code 12802




SC EXT B
Code 12803



SCI503
Code 22461



PSC-W
Code 22462



PSC-B
Code 22463



ASTA NK I 250 ARGENTO
Code 22024



ASTA NK I 350 ARGENTO
Code 22026



ASTA NK I 500 ARGENTO
Code 22027



ASTA NK I 750 ARGENTO
Code 22028



ASTA NK I 1000 ARGENTO
Code 22029



TELENORDIK 5TR
Code 22386

SET PALE 120/48 ARG.PLUS-EVOL. INT
Code 22635

PER INFORMAZIONI / FOR INFORMATION

ITALY
Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES
Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com