

# Lenovo Legion R27qe Gen2 User Guide

---

## Product numbers

F25270QR0

68C7GAC3WW



First Edition (May 2025)

© Copyright Lenovo 2025.

LENOVO products, data, computer software, and services have been developed exclusively at private expense and are sold to governmental entities as commercial items as defined by 48 C.F.R. 2.101 with limited and restricted rights to use, reproduction and disclosure.

**LIMITED AND RESTRICTED RIGHTS NOTICE:** If products, data, computer software, or services are delivered pursuant a General Services Administration “GSA” contract, the use, reproduction, or disclosure is subject to restrictions set forth in Contract No. GS-35F-05925.

---

# Contents

|                                                   |            |
|---------------------------------------------------|------------|
| <b>Product numbers</b>                            | <b>i</b>   |
| <b>Safety information</b>                         | <b>iii</b> |
| General Safety guidelines                         | iii        |
| <b>Chapter 1. Getting Started</b>                 | <b>1-1</b> |
| Shipping contents                                 | 1-1        |
| Notice for use                                    | 1-2        |
| Product overview                                  | 1-2        |
| Adjustment type                                   | 1-2        |
| Tilt                                              | 1-2        |
| Swivel                                            | 1-3        |
| Height Adjustment                                 | 1-3        |
| Monitor Pivot                                     | 1-3        |
| Monitor controls                                  | 1-4        |
| Cable lock slot                                   | 1-4        |
| Setting up your monitor                           | 1-5        |
| Connecting and turning on your monitor            | 1-5        |
| Registering your option                           | 1-7        |
| <b>Chapter 2. Adjusting and Using the Monitor</b> | <b>2-1</b> |
| Comfort and accessibility                         | 2-1        |
| Arranging your work area                          | 2-1        |
| Positioning your monitor                          | 2-1        |
| Quick tips for healthy work habits                | 2-2        |
| Accessibility information                         | 2-2        |
| Adjusting your monitor image                      | 2-3        |
| Using direct access controls                      | 2-3        |
| Using On-Screen Display (OSD) controls            | 2-4        |
| Selecting a supported display mode                | 2-7        |
| Understanding power management                    | 2-8        |
| Power Management Modes                            | 2-8        |
| Caring for your monitor                           | 2-9        |
| Detaching the monitor base and stand              | 2-9        |
| Wall Mounting (Optional)                          | 2-9        |
| <b>Chapter 3. Reference Information</b>           | <b>3-1</b> |
| Monitor specifications                            | 3-1        |
| Troubleshooting                                   | 3-3        |
| Manually installing the monitor driver            | 3-5        |
| Getting further help                              | 3-5        |
| <b>Appendix A. Service and Support</b>            | <b>A-1</b> |
| Registering your option                           | A-1        |
| Online technical support                          | A-1        |
| Quebec Disclaimer                                 | A-1        |
| Telephone technical support                       | A-2        |
| <b>Appendix B. Notices</b>                        | <b>B-1</b> |
| Recycling information                             | B-2        |
| Trademarks                                        | B-2        |
| Power cords and power adapters                    | B-3        |

---

# Safety information

---

## General Safety guidelines

For tips to help you use your computer safely, go to:  
<http://www.lenovo.com/safety>

Before installing this product, read the Safety Information.



**DANGER**

### **To avoid shock hazard:**

- Do not remove the covers.
- Do not operate this product unless the stand is attached.
- Do not connect or disconnect this product during an electrical storm.
- The power cord plug must be connected to a properly wired and grounded power outlet.
- Any equipment to which this product will be attached must also be connected to properly wired and grounded power outlets.
- To isolate the monitor from the electrical supply, you must remove the plug from the power outlet. The power outlet should be easily accessible.

To take special precautions to avoid the introduction of hazards when operating, installing, servicing, transporting or storing equipment, the necessary instructions shall be made available.

To reduce the risk of electric shock, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.

### **Handling:**

- If your monitor weighs more than 18 kg (39.68 lb), it is recommended that it be moved or lifted by two people.

---

# Chapter 1. Getting Started

This User's Guide provides detailed operation instructions for the user. For quick instruction overview, please see the Setup Poster for brief information.


R27qe Gen2 supports Lenovo Accessories and Display Manager - **Artery**.

---

## Shipping contents

The product package should include the following items:

- Information Flyer
- Lenovo Limited Warranty Booklet
- Flat Panel Monitor
- Power Cord
- DP Cable
- Base
- Stand
- Screws

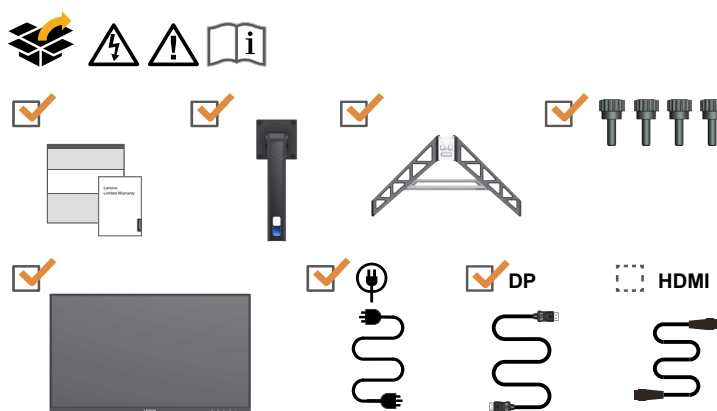


---

## Notice for use

To set up your monitor, please see the illustrations below.

**Note:** Do not touch the screen of the monitor. The screen is made of glass and can be damaged by rough handling or excessive pressure.

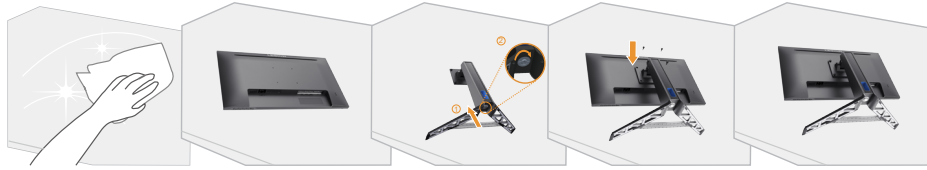

1. Take out the Top cushion and accessories.
2. Insert the base towards the stand and tighten the thumbscrew.
3. Mounting the stand to monitor's recess and tighten the screws.
4. Stand up the monitor with both hands carefully.

**Note:** To connect VESA mounting accessories, refer to "Wall Mounting (Optional)" on page 2-9.


## Product overview

In this section, we will describe how to adjust the position of the monitor; how to set user controls; how to use the cable lock slot.

### Adjustment type

#### Tilt

Please see the illustration below for an example of the tilt range.

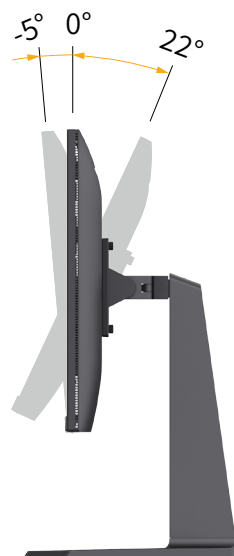


## Swivel

With the built-in pedestal, you can tilt and swivel the monitor for the most comfortable viewing angle.




## Height Adjustment

For height adjustment, user needs to press down or lift up the monitor.

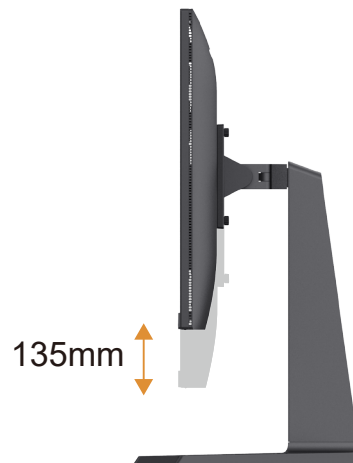

## Monitor Pivot

- Adjust the screen position before rotating the monitor screen. (Make sure that the monitor screen ascent to its highest point, and it inclines backward at 22°.)
- then rotate clockwise/counterclockwise until the monitor stops at 90°

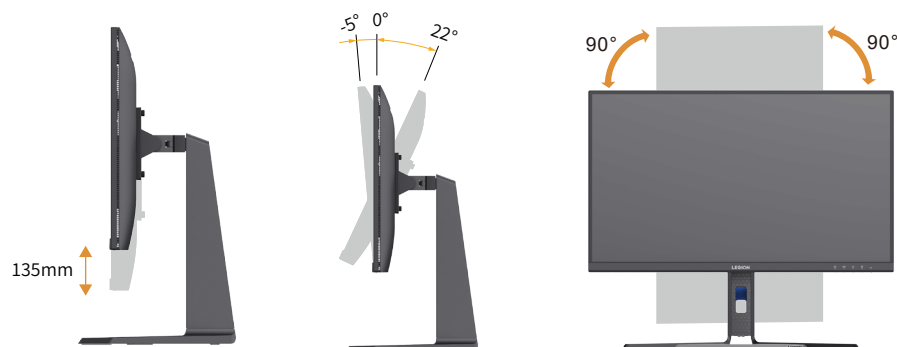

## Monitor controls

The keypad controls on the panel frame are accesses to various functions.



For information on how to utilize these keypad controls, please see “Adjusting your monitor image” on page 2-3.

## Cable lock slot

Your monitor is equipped with a cable lock slot located on the rear of your monitor (in the lower position).



---

## Setting up your monitor

This section provides information on how to set up your monitor.


### Connecting and turning on your monitor

**Note:** Before performing this procedure, be sure to read “Safety information” on page iii.


1. Power off your computer and all attached devices, then unplug the computer power cord.



2. Connect the cables according to below icon indication.

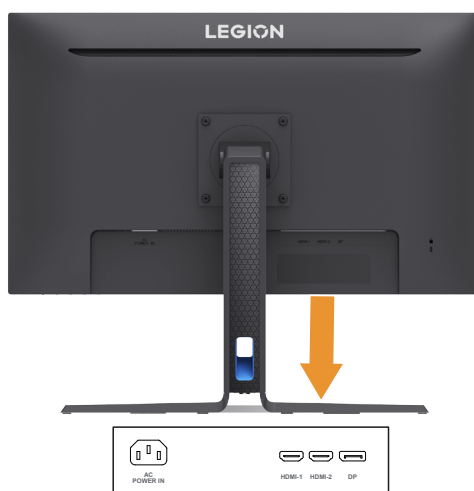


3. Connect one end of the HDMI cable to the monitor HDMI connector and the other end to the computer.

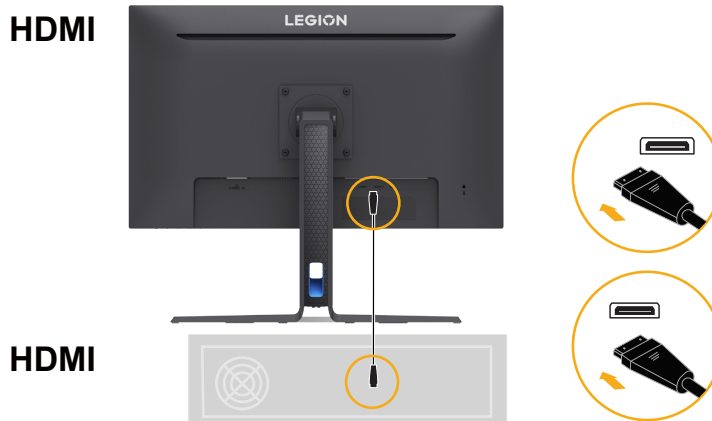

**Note:** Lenovo recommends that customers who require to use the HDMI input on their monitors purchase the “Lenovo HDMI to HDMI Cable OB47070” website: [www.lenovo.com/support/monitoraccessories](http://www.lenovo.com/support/monitoraccessories).

4. Connect one end of the DP cable to the DP input port of the monitor and the other end of the DP cable to the computer.

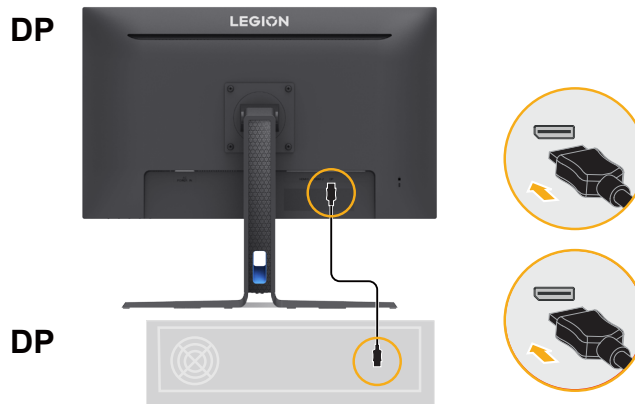


**Note:** Lenovo recommends that customers who require using the DisplayPort input on their monitor purchase the “Lenovo DisplayPort to DisplayPort cable 0A36537”. For more information, go to the following: [www.lenovo.com/support/monitoraccessories](http://www.lenovo.com/support/monitoraccessories)


5. Plug the power cord into the monitor, and then plug the monitor power cord and computer cord into a grounded power outlet.

Note:

A certified power supply cord has to be used with this equipment. The relevant national (regional) installation and/or equipment regulations shall be considered. The certified power cord used should not be lighter than the ordinary PVC flexible cord specified by IEC 60227 (marking H05VV-F 3G 0.75mm<sup>2</sup> or H05VVH2-F2 3G 0.75mm<sup>2</sup>). According to IEC 60245 (marking H05RR-F 3G 0.75mm<sup>2</sup>), synthetic rubber cord should be used.

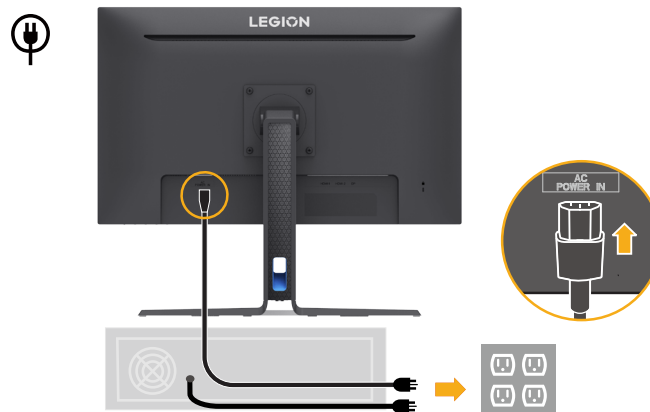

6. Connect the cables with cable clip.

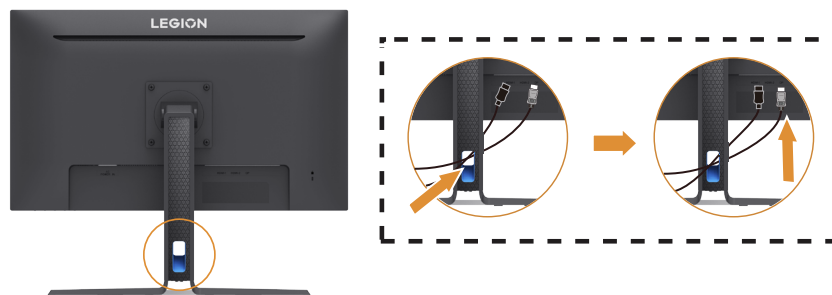

7. Power on the monitor and the computer.



8. When you install the monitor driver, download the driver that corresponds to your monitor model from the Lenovo website [https://pcsupport.lenovo.com/solutions/r27qe\\_gen2](https://pcsupport.lenovo.com/solutions/r27qe_gen2). Refer to the “Manually installing the monitor driver” on page 3-5 section to install the driver.



## Registering your option

Thank you for purchasing this Lenovo™ product. Please take a few moments to register your Product and provide us with information that will help Lenovo to better serve you in the future. Your feedback is valuable to us in developing products and services, as well as in developing better ways to communicate with you. Register your option on the following Website:  
<http://www.lenovo.com/register>.  
Lenovo will send you information and updates on your registered product unless you indicate on the Web site questionnaire that you do not want to receive further information.

---

## Chapter 2. Adjusting and Using the Monitor

This section will give you information on adjusting and using your monitor.

---

### Comfort and accessibility

Good ergonomic design is important to get the most from your personal computer and to avoid discomfort. Arrange your workplace and the equipment you use to suit your individual needs and the kind of work that you perform. In addition, use healthy work habits to maximize your performance and comfort while using your computer. For more detailed information on any of these topics, visit the Healthy Computing Website at: <http://www.lenovo.com/healthycomputing/>.

### Arranging your work area

Use a work surface of appropriate height and sufficient working area to allow you to work in comfort.

Organize your work area to match the way you use materials and equipment. Keep your work area clean and clear for the materials that you typically use and place the items that you use most frequently, such as the computer mouse or telephone, within the easiest reach.

Equipment layout and setup play a large role in your working posture. The following topics describe how to optimize equipment setup to achieve and maintain good working posture.

### Positioning your monitor

Position and adjust your computer monitor for comfortable viewing by considering the following items:

- **Viewing distance:** Recommended viewing distance between the eye and the monitor screen is 1.5 x the diagonal of the screen. Solutions in meeting this required distance in cramped office situations include pulling the desk away from the wall or divider to make room for the monitor, using flat panel or compact displays to place the monitor in the desk corner, or placing the keyboard in an adjustable drawer to create a deeper working surface.

1.5 times of screen diagonal



- **Monitor height:** Position the monitor so your head and neck are in a comfortable and neutral (vertical, or upright) position. If your monitor does not have height adjustments, you might have to place books or other sturdy objects under the base of the monitor to achieve the desired height. A general guideline is to position the monitor such that the top of the screen is at or slightly below your eye-height when you are comfortably seated. However, be sure to optimize your monitor height so the line of site between your eyes and the center the monitor suits your preferences for visual distance and comfortable viewing when your eye muscles are in a relaxed state.
- **Tilt:** Adjust the tilt of your monitor to optimize the appearance of the screen content and to accommodate your preferred head and neck posture.

- **General location:** Position your monitor to avoid glare or reflections on the screen from overhead lighting or nearby windows.

The following are some other tips for comfortable viewing of your monitor:

- Use adequate lighting for the type of work you are performing.
- Use the monitor brightness, contrast controls (if equipped) to optimize the image on your screen to meet your visual preferences.
- Keep your monitor screen clean so you can focus on the screen's contents.

Any concentrated and sustained visual activity can be tiring for your eyes. Be sure to periodically look away from your monitor screen and focus on a far object to allow your eye muscles to relax. If you have questions on eye fatigue or visual discomfort, consult a vision care specialist for advice.

## Quick tips for healthy work habits

The following information is a summary of some important factors to consider to help you remain comfortable and productive while you use your computer.

- **Good posture starts with equipment setup:** The layout of your work area and the setup of your computer equipment have a large effect on your posture while using your computer. Be sure to optimize the position and orientation of your equipment by following the tips outlined in “Arranging your work area” on page 2-1 so you can maintain a comfortable and productive posture. Also, be sure to use the adjustment capabilities of your computer components and office furniture to best suit your preferences now and as your preferences change over time.
- **Minor changes in posture can help avoid discomfort:** The longer you sit and work with your computer, the more important it is to observe your working posture. Avoid assuming any one posture for an extended period of time. Periodically make minor modifications in your posture to help deter any discomforts that might arise. Make use of any adjustments that your office furniture or equipment provide to accommodate changes in posture.
- **Regular short breaks help ensure healthy computing:** Because computing work is mainly static activity, short breaks during work are especially important. Periodically, stand up from your work area, stretch, walk around or have a drink etc., to take a short break from using your computer. A short break from work gives your body a welcome change in posture and helps to ensure you remain comfortable and productive while working.

## Accessibility information

Lenovo is committed to providing greater access to information and technology to people with disabilities. With assistive technologies, users can access information in the way most appropriate to their disability. Some of these technologies are already provided in your operating system; others can be purchased through vendors or accessed at:  
[https://lenovo.ssbartgroup.com/lenovo/request\\_vpat.php](https://lenovo.ssbartgroup.com/lenovo/request_vpat.php)

---

## Adjusting your monitor image

This section describes the control features to adjust your monitor images.


### Using direct access controls

Direct access controls can be used when the On-Screen Display (OSD) is not displayed.

|   | Icon                                                                                | Name            | Description                                                                                                  |
|---|-------------------------------------------------------------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------|
| 1 |    | Game Mode       | It is a shortcut key for directly opening the menu of game mode while there is no any OSD on the screen.     |
|   |                                                                                     | DDC/CI          | Press and hold for 10 seconds to Enable/Disable the "DDC/CI" while there is no any OSD on the screen.        |
|   |    | Exit            | Press to exit next level on main menu or sub menu.                                                           |
| 2 |    | Input Source    | It is a shortcut key for directly opening the menu of input source while there is no any OSD on the screen.  |
|   |    | Up Key          | Press to move to last item on menu.                                                                          |
| 3 |    | Brightness      | It is a shortcut key for directly opening brightness adjustment bar while there is no any OSD on the screen. |
|   |    | Down Key        | Press to move to next item on menu.                                                                          |
| 4 |  | Menu            | Press to open main menu while there is no any OSD on the screen.                                             |
|   |                                                                                     | OSD Lock/Unlock | Press and hold for 10 seconds to Lock/Unlock the OSD.                                                        |
|   |  | Enter key       | Press to enter next level on main menu or sub menu.                                                          |
| 5 |  | Power button    | Turns the monitor on/off. White indicates power on. Orange indicates standby/power saving mode.              |

## Using On-Screen Display (OSD) controls

To adjust the settings, the user controls can be viewed through the OSD.

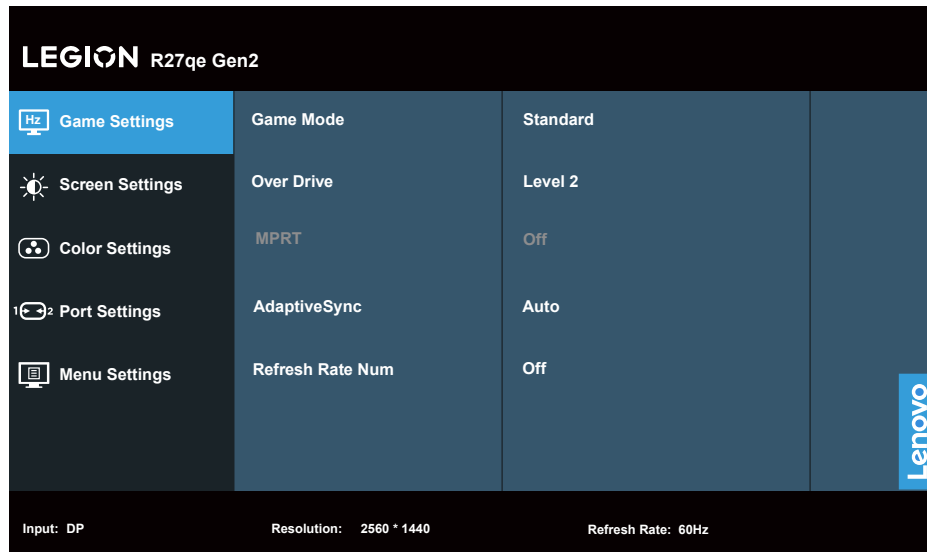

To use the controls:

1. Press  to open the main OSD menu.
2. Use  or  to move among the icons. Select an icon and press  to access the selected function. If there is a sub-menu, you can move between options using  or , then press  to select that function. Use  or  to make adjustments then press  to save.
3. Press  to move backwards through the sub-menus and exit from the OSD.
4. Enables DDC/CI by default. Use OSD Exit Key, Press and hold  for 10 seconds to disable/enable DDC/CI function. A message "DDC/CI disable" is shown on the screen.

Table 2-1. OSD functions

| OSD Icon on Main Menu                                                                                  | Sub menu         | Description                                                                                                      | Controls and Adjustments |
|--------------------------------------------------------------------------------------------------------|------------------|------------------------------------------------------------------------------------------------------------------|--------------------------|
| <br>Game Settings     | Game Mode        | [Standard]                                                                                                       | All input ports          |
|                                                                                                        |                  | Standard                                                                                                         |                          |
|                                                                                                        |                  | FPS1: First person shooter 1 mode.                                                                               |                          |
|                                                                                                        |                  | FPS2: First person shooter 2 mode.                                                                               |                          |
|                                                                                                        |                  | Racing: Racing mode                                                                                              |                          |
|                                                                                                        |                  | RTS: Real-Time-Strategy mode.                                                                                    |                          |
|                                                                                                        |                  | Game1: [Brightness/Over Drive/Contrast/Relative Gamma]                                                           |                          |
|                                                                                                        |                  | Game2: [Brightness/Over Drive/Contrast/Relative Gamma]                                                           |                          |
|                                                                                                        | Over Drive       | Respond time enhancement                                                                                         |                          |
|                                                                                                        |                  | [Level 2] Off/Level 1/Level 2/Level 3/Level 4                                                                    |                          |
|                                                                                                        | MPRT             | [Off] Off/On                                                                                                     |                          |
|                                                                                                        | AdaptiveSync     | [Auto (AMD FreeSync Premium )]<br>Auto (AMD FreeSync Premium )/Off                                               | Only DP port             |
|                                                                                                        | FreeSync         | [Auto] Off/Auto                                                                                                  | Only HDMI port           |
|                                                                                                        | Refresh Rate Num | Display the panel's current refresh rate on the screen.<br>[Off] Off/Left Top/Right Top/Left Bottom/Right Bottom | All input ports          |
| <br>Screen Settings | Brightness       | Adjusts overall screen brightness.<br>[75]0~100                                                                  | All input ports          |
|                                                                                                        | Contrast         | Adjusts difference between light and dark areas.<br>[75]0~100                                                    |                          |
|                                                                                                        | DCR              | [Off] Off/On                                                                                                     |                          |
|                                                                                                        | HDR              | [Auto] Auto/Off                                                                                                  |                          |
|                                                                                                        | Dark Boost       | [Level 4] Level 1/Level 2/Level 3/Level 4                                                                        |                          |
|                                                                                                        | Scaling Mode     | [Full Screen] Original AR/Full Screen                                                                            |                          |
|                                                                                                        | Sharpness        | [50]0~100                                                                                                        |                          |
|                                                                                                        | Relative Gamma   | [Default]-0.4/-0.2/Default/+0.2/+0.4/Off                                                                         |                          |
|                                                                                                        | Video Range      | [Full Range 0-255]<br>Auto/Full Range 0-255/Limited Range 16-235                                                 | Only HDMI port           |

| OSD Icon on Main Menu                                                                                | Sub menu           | Description                                                                                                                                                                               | Controls and Adjustments |
|------------------------------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <br>Color Settings  | Color Temp.        | [Warm]<br>sRGB/Warm/Neutral/Cool/User (Select this option to enter the next page)                                                                                                         | All input ports          |
|                                                                                                      | Low Blue Light     | [Off] Off/On                                                                                                                                                                              |                          |
| <br>Port Settings   | Input Signal       | Auto Switch Input<br>The input will automatically switch to the next available input when:<br>There is no input signal present.<br>The time out period has expired.<br>[Enable] Check box | All input ports          |
|                                                                                                      |                    | DP                                                                                                                                                                                        |                          |
|                                                                                                      |                    | HDMI1                                                                                                                                                                                     |                          |
|                                                                                                      |                    | HDMI2                                                                                                                                                                                     |                          |
|                                                                                                      | DP                 | [DP1.4] DP1.2/DP1.4                                                                                                                                                                       | Only DP port             |
| <br>Menu Settings | Information        | Model                                                                                                                                                                                     | All input ports          |
|                                                                                                      |                    | Firmware                                                                                                                                                                                  |                          |
|                                                                                                      |                    | SN                                                                                                                                                                                        |                          |
|                                                                                                      |                    | HDR                                                                                                                                                                                       |                          |
|                                                                                                      |                    | Mode                                                                                                                                                                                      |                          |
|                                                                                                      |                    | Format                                                                                                                                                                                    |                          |
|                                                                                                      | Language           | Changes languages of menu.<br>Note: The selected language only affects the language of the OSD. It has no effect on any software running on the computer.                                 |                          |
|                                                                                                      | Button Repeat Rate | [Default] Default/Slow/Off                                                                                                                                                                |                          |
|                                                                                                      | LED Indicator      | [On] Off/On                                                                                                                                                                               |                          |
|                                                                                                      | OSD Timeout        | Set the duration of time that the OSD will remain active when no operation is performed.<br>[10]5~60 (1 seconds per unit)                                                                 |                          |
|                                                                                                      | Menu Horizontal    | [0]0~100                                                                                                                                                                                  |                          |
|                                                                                                      | Menu Vertical      | [0]0~100                                                                                                                                                                                  |                          |
|                                                                                                      | Transparency       | [0]0/20/40/60/80/100                                                                                                                                                                      |                          |
|                                                                                                      | DDC/CI             | [On] Off/On                                                                                                                                                                               |                          |
|                                                                                                      | Reset All Settings | Reset monitor to the original settings.                                                                                                                                                   |                          |

## Selecting a supported display mode

The display mode of the monitor uses is controlled by the computer. Therefore, refer to your computer documentation on how to change display modes.

The image size, position and shape might be changed when the display mode changes. This is normal and the image can be re-adjusted using automatic image setup and the image controls.

Unlike CRT monitors, which require a high refresh rate to minimize flicker, LCD or Flat Panel technology is inherently flicker-free.

**Note:** If your system has previously been used with a CRT monitor and is currently configured to a display mode outside the range of this monitor, you may need to reattach the CRT monitor temporarily until you have re-configured the system; preferably to 2560 x 1440 at 60 Hz, which is a common display mode.

The display modes shown below have been optimized at the factory.

*Table 2-2. Factory set display modes*

| Address ability         | Refresh rate               |
|-------------------------|----------------------------|
| 720x400                 | 70 Hz                      |
| 640x480                 | 60 Hz, 67 Hz, 72 Hz, 75 Hz |
| 800x600                 | 60 Hz, 72 Hz, 75 Hz        |
| 832x624                 | 75 Hz                      |
| 1024x768                | 60 Hz, 70 Hz, 75 Hz        |
| 1280x1024               | 75 Hz                      |
| 1280x720                | 60 Hz                      |
| 1280x800                | 60 Hz                      |
| 1440x900                | 60 Hz                      |
| 1600x900                | 60 Hz                      |
| 1680x1050               | 60 Hz                      |
| 1920x1080               | 60 Hz                      |
| 1920x1080               | 120 Hz (Only DP port)      |
| 1920x1200               | 60 Hz                      |
| 2560x1440               | 60 Hz, 120 Hz, 144 Hz      |
| 2560x1440(Only DP port) | 165 Hz, 180 Hz, 200 Hz     |
| 480p                    | 60 Hz                      |
| 576p                    | 60 Hz                      |
| 720p                    | 50 Hz, 60 Hz               |
| 1080p                   | 50 Hz, 60 Hz, 120 Hz       |
| 2160p (Only HDMI port)  | 24 Hz, 30 Hz, 60 Hz        |

## Understanding power management

Power management is invoked when the computer recognizes that you have not used your mouse or keyboard for a user-definable period. There are several states as described in the table below.

For optimal performance, switch off your monitor at the end of each working day, or whenever you expect to leave it unused for long periods during the day.

Table 2-3. Power indicator

| State           | Power Indicator | Screen | Restoring Operation                                                                                                                                                      |
|-----------------|-----------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| On              | White           | Normal |                                                                                                                                                                          |
| Standby/Suspend | Orange          | Blank  | Press a key or move the mouse<br>There may be a slight delay before the image reappears.<br><b>Note:</b> Standby also occurs if there is no image output to the monitor. |
| Off             | Off             | Blank  | Press the power button<br>There may be a slight delay before the image reappears.                                                                                        |

## Power Management Modes

| VESA Modes       | Horizontal Sync | Vertical Sync | Video  | Power Indicator | Power Consumption                 |
|------------------|-----------------|---------------|--------|-----------------|-----------------------------------|
| Normal operation | Active          | Active        | Active | White           | 65 W (maximum)*<br>22 W (typical) |
| Active-off mode  | Inactive        | Inactive      | Off    | Amber           | Less than 0.5 W                   |
| Switch off       | -               | -             | -      | Off             | Less than 0.3 W                   |

**\* Maximum power consumption with max luminance.**

This document is informational only and reflects laboratory performance. Your product may perform differently, depending on the software, components and peripherals you ordered and shall have no obligation to update such information. Accordingly, the customer should not rely upon this information in making decisions about electrical tolerances or otherwise. No warranty as to accuracy or completeness is expressed or implied.

---

## Caring for your monitor

Be sure to turn off the power before you perform any maintenance on the monitor.

**Do not:**

- Apply water or liquid directly to your monitor.
- Use solvents or abrasives.
- Use flammable cleaning materials to clean your monitor or any other electrical equipment.
- Touch the screen area of your monitor with sharp or abrasive items. This type of contact may cause permanent damage to your screen.
- Use any cleaner which contains an anti-static solution or similar additives. This may harm the coating of the screen area.

**Do:**


- Lightly dampen a soft cloth with water and use this to gently wipe the covers and the screen.
- Remove grease or finger marks with a damp cloth and a little mild detergent.

---

## Detaching the monitor base and stand

Step 1: Place the monitor on a soft and flat surface.

Step 2: Remove the screws from base before detaching base and stand from the monitor.



---

## Wall Mounting (Optional)


Refer to the instructions that come with the base mounting kit. To convert your LCD display from a desk-mounted to a wall-mounted display, do the following:

Step 1: Verify that the Power button is turned Off, then disconnect the power cord.

Step 2: Lay the LCD display face down on a towel or blanket.

Step 3: Remove the base from the monitor, refer to “Detaching the monitor base and stand”.

Step 4: Attach the mounting bracket from the VESA compatible wall mounting kit (100 mm x 100 mm distance), VESA Mounting Screw M4 x 10 mm.



Step 5: Attach the LCD display to the wall, following the instructions in the wall-mounting kit.

For use only with UL Listed Wall Mount Bracket with minimum weight/load: 8kg

**Note:**

When you use a flexible arm, do not tilt the monitor downward by more than 5 degrees.

---

## Chapter 3. Reference Information

This section contains monitor specifications, instructions to manually install the monitor driver, troubleshooting information.

---

### Monitor specifications

Table 3-1. Monitor specifications for type-model R27qe Gen2

|                                                                                                               |                           |                                       |
|---------------------------------------------------------------------------------------------------------------|---------------------------|---------------------------------------|
| Dimensions                                                                                                    | Depth                     | 258.8 mm (10.19 inches)               |
|                                                                                                               | Height                    | 518.2~383.2 mm (20.40 ~ 15.09 inches) |
|                                                                                                               | Width                     | 613.1 mm (24.14 inches)               |
| Stand                                                                                                         | Tilt                      | Range: -5°~22°                        |
| VESA mount                                                                                                    | Supported                 | 100 mm (3.94 inches)                  |
| Image                                                                                                         | Viewable image size       | 68.6 cm (27 inches)                   |
|                                                                                                               | Maximum height            | 335.7 mm (13.2 inches)                |
|                                                                                                               | Maximum width             | 596.7 mm (23.5 inches)                |
|                                                                                                               | Pixel pitch               | 0.2331 mm × 0.2331 mm (0.009 inches)  |
| Power input                                                                                                   | Rating                    | 100-240 VAC<br>50~60 Hz<br>1.5A       |
| Power consumption<br><b>Note:</b> Power consumption figures are for the monitor and the power supply combined | Normal operation          | 65 W (max)<br>22 W (Typical)          |
|                                                                                                               | Standby/Suspend           | <0.5 W                                |
|                                                                                                               | Off                       | <0.3 W                                |
| Video input (HDMI)                                                                                            | Input signal              | HDMI                                  |
|                                                                                                               | Horizontal addressability | 2560 pixels (maximum)                 |
|                                                                                                               | Vertical addressability   | 1440 lines (maximum)                  |
|                                                                                                               | Clock frequency           | 600MHz                                |
| Video input (DP)                                                                                              | Input signal              | DP                                    |
|                                                                                                               | Horizontal addressability | 2560 pixels (maximum)                 |
|                                                                                                               | Vertical addressability   | 1440 lines (maximum)                  |
|                                                                                                               | Clock frequency           | 8.1GHz/Lane                           |

*Table 3-1. Monitor specifications for type-model R27qe Gen2*

|                         |                      |                                       |
|-------------------------|----------------------|---------------------------------------|
| Communications          | VESA DDC             | CI                                    |
| Supported Display Modes | Horizontal frequency | DP(30 - 300KHz)<br>HDMI(30 - 215 KHz) |
|                         | Vertical frequency   | DP(48 - 200Hz)<br>HDMI(48 - 144Hz)    |
|                         | Native Resolution    | 2560 × 1440 @ 60 Hz                   |
| Temperature             | Operating            | 0° to 40°C (32° to 104°F)             |
|                         | Storage              | -20° to 60°C (-4° to 140°F)           |
|                         | Shipping             | -20° to 60°C (-4° to 140°F)           |
| Humidity                | Operating            | 8% to 80% non-condensing              |
|                         | Storage              | 5% to 95% non-condensing              |
|                         | Shipping             | 5% to 95% non-condensing              |

## Troubleshooting

If you have a problem setting up or using your monitor, you might be able to solve it yourself. Before calling your dealer or Lenovo, try the suggested actions that are appropriate to your problem.

Table 3-2. Troubleshooting

| Problem                                                                                      | Possible cause                                                                                                                                                                                 | Suggested action                                                                                                                                                                                                                                                                                                      | Reference                                            |
|----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|
| The words "Out of Range" are shown on the screen, and the power indicator is flashing white. | The system is set to a display mode which is not supported by the monitor.                                                                                                                     | If you are replacing an old monitor, reconnect it and adjust the display mode to within the specified range for your new monitor.<br>If using a Windows system, restart the system in safe mode, then select a supported display mode for your computer.<br>If these options do not work, contact the Support Center. | "Selecting a supported display mode" on page 2-7     |
| The image quality is unacceptable.                                                           | The video signal cable is not connected with the monitor or system completely.                                                                                                                 | Be sure the signal cable is firmly plugged into the system and monitor.                                                                                                                                                                                                                                               | "Connecting and turning on your monitor" on page 1-5 |
|                                                                                              | The color settings may be incorrect.                                                                                                                                                           | Select another color setting from the OSD menu.                                                                                                                                                                                                                                                                       | "Adjusting your monitor image" on page 2-3           |
|                                                                                              | The automatic image setup function was not performed.                                                                                                                                          | Perform automatic image setup.                                                                                                                                                                                                                                                                                        | "Adjusting your monitor image" on page 2-3           |
| The power indicator is not lit and there is no image.                                        | <ul style="list-style-type: none"><li>• The monitor's power switch is not switched on.</li><li>• The power cord is loose or disconnected.</li><li>• There is no power at the outlet.</li></ul> | <ul style="list-style-type: none"><li>• Be sure the power cord is connected properly.</li><li>• Be sure the outlet has power.</li><li>• Power on the monitor.</li><li>• Try using another power cord.</li><li>• Try using another electrical outlet.</li></ul>                                                        | "Connecting and turning on your monitor" on page 1-5 |
| Screen is blank and power indicator is amber.                                                | The monitor is in Standby/Suspend mode.                                                                                                                                                        | <ul style="list-style-type: none"><li>• Press any key on the keyboard or move the mouse to restore operation.</li><li>• Check the Power Options settings on your computer.</li></ul>                                                                                                                                  | "Understanding power management" on page 2-8         |

*Table 3-2. Troubleshooting*

| <b>Problem</b>                                                                                                                                            | <b>Possible cause</b>                                                                                                                                                        | <b>Suggested action</b>                                                                                                                  | <b>Reference</b>                                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|
| The power indicator is amber, but there is no image.                                                                                                      | The video signal cable is loose or disconnected from the system or monitor.                                                                                                  | Be sure the video cable is connected with the system properly.                                                                           | "Connecting and turning on your monitor" on page 1-5          |
|                                                                                                                                                           | The monitor brightness and contrast are at the lowest setting.                                                                                                               | Adjust the brightness and contrast setting on the OSD menu.                                                                              | "Adjusting your monitor image" on page 2-3                    |
| One or more of the pixels appear discolored.                                                                                                              | This is a characteristic of the LCD technology and is not an LCD defect.                                                                                                     | If there are more than five pixels missing, contact the Support Center.                                                                  | "Appendix A. Service and Support" on page A-1                 |
| <ul style="list-style-type: none"> <li>• Lines or images are blurred in the text.</li> <li>• There are horizontal or vertical lines in images.</li> </ul> | <ul style="list-style-type: none"> <li>• Image setup has not been optimized.</li> <li>• The "Display Properties" settings of your system have not been optimized.</li> </ul> | According to the resolution of the monitor itself, adjust the resolution setting of the system: 2560 x 1440 @ 60 Hz                      | "Adjusting your monitor image" on page 2-3                    |
|                                                                                                                                                           |                                                                                                                                                                              | Perform automatic image setup. If automatic image setup does not help, perform manual image setup.                                       | "Selecting a supported display mode" on page 2-7              |
|                                                                                                                                                           |                                                                                                                                                                              | When working in the native resolution, you may find additional improvements by adjusting the Dots Per Inch (DPI) setting on your system. | See the Advanced section of your system's display properties. |

---

## Manually installing the monitor driver

Below are steps for manually installing the monitor driver in Microsoft Windows 10, Microsoft Windows 11.

1. Turn off the computer, all attached devices.
2. Ensure that the monitor is connected correctly.
3. Turn on the monitor and then the system unit. Allow your computer to start the Windows operating system.
4. From the Lenovo website [https://pcsupport.lenovo.com/solutions/r27qe\\_gen2](https://pcsupport.lenovo.com/solutions/r27qe_gen2), find the corresponding monitor driver and download it to a PC to which this monitor is connected (such as a desktop).
5. Right-click the Windows **Start** button on the desktop, then click **Device Manager**, and double click **Monitor**.
6. Double-click **Generic Monitor**.
7. Click the **Driver** tab.
8. Click **Update Driver**, and then click **Browse Computer to find the driver**.
9. Click **Let me pick from a list of available drivers on my computer**.
10. Click the **Have Disk...** button. By clicking the **Browse** button, browse and point to the following path: **X:\Monitor Drivers\Windows** (where X indicates “the folder in which the downloaded driver is located” (such as a desktop)).
11. Select **R27qe Gen2.inf** file, Click **Open** button. Click **OK** button.
12. In the new window, select **R27qe Gen2** and click **Next**.
13. After the installation is complete, delete all downloaded files and close all Windows.
14. Restart the system. The system will automatically select the refresh rate and the corresponding color matching profile.

**Note:** On LCD monitors, unlike CRTs, a faster refresh rate does not improve display quality. Lenovo recommends using either 2560 × 1440 at a refresh rate of 60 Hz, or 640 × 480 at a refresh rate of 60 Hz.

## Getting further help

If you still can't solve your problem, please contact the Lenovo Support Center. For more information on contacting the Support Center, please see “Appendix A. Service and Support” on page A-1

## Service information

### Customer responsibilities

The warranty does not apply to a product which has been damaged due to accident, misuse, abuse, improper installation, usage not in accordance with product specifications and instructions, natural or personal disaster, or unauthorized alterations, repairs or modifications. The following are examples of misuse or abuse and not covered by warranty:

- Images burned on to the screen of a CRT monitor. Burned image is preventable by utilizing a moving screen saver or power management.
- Physical damage to covers, bezel, base and cables.
- Scratches or punctures on monitor screens.

### Service parts

The following parts are for use by Lenovo service, or Lenovo authorized dealers, to support the customer warranty. Parts are for service use only. The table below shows information for model 68C7GAC3WW.

Table 3-3. Repair parts list (F25270QR0)

| <b>FRU (FIELD<br/>REPLACEABLE UNIT)<br/>PART NUMBER</b> | <b>Description</b>                    | <b>Machine Type/<br/>Model (MTM)</b> | <b>Color</b> |
|---------------------------------------------------------|---------------------------------------|--------------------------------------|--------------|
| 5C11J37846                                              | DP1.4 cable 1.8m FRU--BOE             | 68C7                                 | Black        |
| 5CF1P41526                                              | R27qe Gen2 carton EPS FRU             | 68C7                                 | Yellow       |
| 5CF1P41527                                              | R27qe Gen2 carton Green package FRU   | 68C7                                 | Yellow       |
| 5D11P36240                                              | R27qe Gen2 -27 inch FRU Monitor(HDMI) | 68C7                                 | Black        |
| 5SE1P38245                                              | R27qe Gen2-FRU Stand and Base         | 68C7                                 | Black        |

---

## Appendix A. Service and Support

The following information describes the technical support that is available for your product, during the warranty period or throughout the life of your product. Refer to the Lenovo Limited Warranty for a full explanation of Lenovo warranty terms.

---

### Registering your option

Register to receive product service and support updates, as well as free and discounted computer accessories and content. Go to:  
<http://www.lenovo.com/register>

---

### Online technical support

Online technical support is available during the lifetime of a product at:  
<http://www.lenovo.com/support>

Product replacement assistance or exchange of defective components also is available during the warranty period. In addition, if your option is installed in a Lenovo computer, you might be entitled to service at your location. A Lenovo technical support representative can help you determine the best alternative.

---

### Quebec Disclaimer

#### **Quebec Disclaimer: English**

##### **IMPORTANT NOTICE FOR QUEBEC CONSUMERS:**

In regard to section 79.18 of Quebec's Regulation respecting the application of the Consumer Protection Act, Lenovo in no way guarantees the availability of (a) replacement parts; (b) repair services; and (c) information necessary to maintain or repair the goods. For up-to-date information on the technical support and parts available for your purchase, please consult <https://support.lenovo.com/ca/en>

#### **Quebec Disclaimer: Canadian French**

##### **AVIS IMPORTANT POUR LES CONSOMMATEURS DU QUÉBEC:**

En ce qui concerne l'article 79.18 du Règlement d'application de la Loi sur la protection du consommateur du Québec, Lenovo ne garantit en aucune façon la disponibilité des éléments suivants : (a) les pièces de rechange; (b) les services de réparation; et (c) les renseignements nécessaires à l'entretien à la réparation du bien. Pour obtenir des renseignements à jour sur le soutien technique et les pièces disponibles pour votre achat, veuillez consulter <https://support.lenovo.com/ca/fr>.

---

## Telephone technical support

Installation and configuration support through the Customer Support Center will be available until 90 days after the option has been withdrawn from marketing. After that time, the support is cancelled, or made available for a fee, at Lenovo's discretion. Additional support is also available for a nominal fee.

Before contacting a Lenovo technical support representative, please have the following information available: option name and number, proof of purchase, computer manufacturer, model, serial number and manual, the exact wording of any error message, description of the problem, and the hardware and software configuration information for your system.

Your technical support representative might want to walk you through the problem while you are at your computer during the call.

Telephone numbers are subject to change without notice. The most up-to-date telephone list for Lenovo Support is always available at: <http://www.lenovo.com/support/phone>

| Country or Region | Telephone Number         |
|-------------------|--------------------------|
| China             | 400-990-8888             |
| South Africa      | 800982393                |
| Argentina         | 0800-444-24.522(Spanish) |
| Australia         | 1300-557-073             |
| Austria           | 800295730(German)        |
| Belgium           | 80076524(French, Dutch)  |
| Bolivia           | 800-100-764(Spanish)     |

---

## Appendix B. Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead.

However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service.

Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

*Lenovo (United States), Inc.  
1009 Think Place - Building One  
Morrisville, NC 27560  
U.S.A.  
Attention: Lenovo Director of Licensing*

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary.

Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk.

Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

---

## Recycling information

Lenovo encourages owners of information technology (IT) equipment to responsibly recycle their equipment when it is no longer needed. Lenovo offers a variety of programs and services to assist equipment owners in recycling their IT products. For information on recycling Lenovo products, go to:

<http://www.lenovo.com/lenovo/recycling>

環境配慮に関して

本機器またはモニターの回収リサイクルについて

企業のお客様が、本機器が使用済みとなり廃棄される場合は、資源有効利用促進法の規定により、産業廃棄物として、地域を管轄する県知事あるいは、政令市長の許可を持った産業廃棄物処理業者に適正処理を委託する必要があります。また、弊社では資源有効利用促進法に基づき使用済みパソコンの回収および再利用・再資源化を行う「PC 回収リサイクル・サービス」を提供しています。詳細は、[https://www.lenovo.com/jp/ja/services\\_warranty/recycle/personal/](https://www.lenovo.com/jp/ja/services_warranty/recycle/personal/)をご参照ください。

また、同法により、家庭で使用済みとなったパソコンのメーカー等による回収再資源化が 2003 年 10 月 1 日よりスタートしました。詳細は、[https://www.lenovo.com/jp/ja/services\\_warranty/recycle/personal/](https://www.lenovo.com/jp/ja/services_warranty/recycle/personal/)をご参照ください。

重金属を含む内部部品の廃棄処理について

本機器のプリント基板等には微量の重金属（鉛など）が使用されています。使用後は適切な処理を行うため、上記「本機器またはモニターの回収リサイクルについて」に従って廃棄してください。

### Collecting and recycling a disused Lenovo computer or monitor

If you are a company employee and need to dispose of a Lenovo computer or monitor that is the property of the company, you must do so in accordance with the Law for Promotion of Effective Utilization of Resources. Computers and monitors are categorized as industrial waste and should be properly disposed of by an industrial waste disposal contractor certified by a local government. In accordance with the Law for Promotion of Effective Utilization of Resources, Lenovo Japan provides, through its PC Collecting and Recycling Services, for the collecting, reuse, and recycling of disused computers and monitors. For details, visit the Lenovo Web site at [https://www.lenovo.com/jp/ja/services\\_warranty/recycle/personal/](https://www.lenovo.com/jp/ja/services_warranty/recycle/personal/). Pursuant to the Law for Promotion of Effective Utilization of Resources, the collecting and recycling of home-used computers and monitors by the manufacturer was begun on October 1, 2003. This service is provided free of charge for home-used computers sold after October 1, 2003. For details, visit the Lenovo Web site at [https://www.lenovo.com/jp/ja/services\\_warranty/recycle/personal/](https://www.lenovo.com/jp/ja/services_warranty/recycle/personal/)

### Disposing of Lenovo computer components

Some Lenovo computer products sold in Japan may have components that contain heavy metals or other environmental sensitive substances. To properly dispose of disused components, such as a printed circuit board or drive, use the methods described above for collecting and recycling a disused computer or monitor.

---

## Trademarks

The following terms are trademarks of Lenovo in the United States, other countries, or both:

- Lenovo
- The Lenovo logo
- ThinkCenter
- ThinkPad
- ThinkVision

Microsoft, Windows, and Windows NT are trademarks of the Microsoft group of companies. Other company, product, or service names may be trademarks or service marks of others.

---

## **Power cords and power adapters**

Use only the power cords and power adapters supplied by the product manufacturer.  
Do not use the ac power cord for other devices.